



**Key Sector
Fastener Catalogue**

概述

General Information

2007 年成立
Founded 2007

12,000 m²
设施 / Facility

75+
员工 / Employees

60,000 m²
占地面积 / Land Scope

Full Range
Manufacturing
Capacity

Projected 80-85M
Turnover Per Annum



市场 Our Markets



重型卡车
Heavy Truck



石油工业
Petroleum



能源产业
Energy



建筑行业
Construction



汽配业
Automotive



动力总成
Powertrain



农业
Agriculture



运输业
Heavy Truck



我们拥有专业市场领域丰富的制造能力，
能够预见并解决各类行业特定挑战。

We bring abundant manufacturing capabilities within specialised markets, allowing us to anticipate and solve a wide variety of industry-specific challenges

质量管控 实验设备

Quality Management & Lab Facilities 



CJW
荧光磁粉探伤检测线



Optical sorting machine
光学挑选机



Low-temperature impact
低温冲击试验机



2.5D Projector
2.5次元



Metallurgical Microscope
金相显微镜



Profile
轮廓仪



Tensile testing machine
拉力机



Rockwell Hardwell Tester
洛氏硬度计



Micro Vickers Hardwell Tester
显微维氏硬度计



Handheld Spectrum Analyse
手持式光谱分析仪

证书 Our Certificates



石油工业用 **API 20E BSL-3** 质量认证

石油工业用 **API 20F BSL-3** 质量认证

Quality Certificate of API 20E BSL-3 for Petroleum Industrial

Quality Certificate of API 20F BSL-3 for Petroleum Industrial



IATF 16949:2016 质量管理体系认证

Quality Certificate of ITAF 16949:2016



ISO 14001 环境管理体系认证

ISO 9001:2015 质量管理体系认证

Environmental certificate of ISO14001

Certified of ISO 9001:2015

标准件

Standard Fasteners



尺寸 Size	长度 Length	备注 Remarks
M5 to M20 (1/4" to 3/4")	10 to 200mm (1/2" to 7 3/4")	冷打 Cold Forge
Max. M64 (Max. 2.5")	Max. 1500mm (Max. 59")	热打 Hot Forge

可生产ISO, DIN, BS, ANSI, GB, JIS, VGS或根据客户要求开发
To meet the standard of DIN, BS, ANSI, GB, JIS, VGS;
Or develop per customer's **Drawing & Specification**

强度等级为 8.8, 9.8, 10.9和12.9 (英制5级以上)
Covers the grade of 8.8, 9.8, 10.9, 12.9
(Grade 5 of above for Inching products)

标准件

Standard Fasteners




尺寸 Size	长度 Length	备注 Remarks
ø5 to ø30	10 to 300mm	冷打Cold Forge +机加 Machining

可生产碳钢，合金钢，不锈钢，铝的机加，定位销及其他配套产品

The Pin/Dowel Pin and Other Machine Parts with Material of Carbon Steel,
Alloy Steel, Stainless Steel and Aluminium
According to customer drawing

风电系列

Wind Power Industry

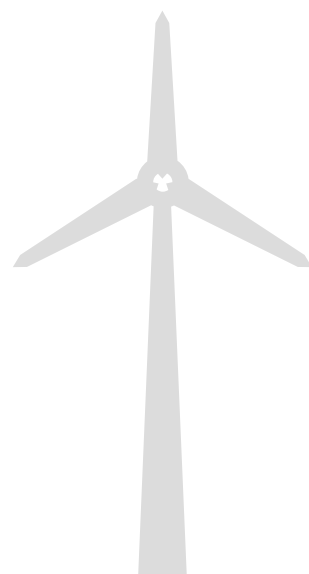

包括外六角、双头螺柱、螺母、垫圈
主要应用于基础、塔筒、叶片、机体等部位

Including Hex, Bolt, Stud, Nut & Washer
For the application of Foundation, Tower, Blades, and Main Body

规格最大 Max. size **M64**

表面处理包括**Delta, Dacromate, Geomet, HDG**或根据客户要求
Coating including **Delta, Dacromate, Geomet, HDG** or per customer's
Special Requirement

强度等级为**8.8, B7, 10.9, 12.9**
Grade **8.8, B7, 10.9, 12.9**



双头螺柱

Stud Products

双头螺柱

尺寸自M6至M50 (英制自1/4" 至 2") 强度
等级自 8.8 to 12.9, B7 & B7M, L7& L7M

Stud Product

Size from M6 to M48 (Inching from 1/4" to 2")
Grade from 8.8 to 12.9, B7 & B7M, L7 & L7M



外梅花法兰

12 Point Head Flange

双头螺柱

尺寸自M6至M50 (英制自1/4" 至 2") 强度
等级自 8.8 to 12.9, B7 & B7M, L7& L7M

Stud Product

Size from M6 to M48 (Inching from 1/4" to 2")
Grade from 8.8 to 12.9, B7 & B7M, L7 & L7M

车间设备

Shop & Facility



Cold Forging Area
冷锻区域



Hot Forge Facilities
红打设备



Continuous (Nitrogen Atmosphere Controlled) Heat Treatment Furnace,
with process of De-phosphate and Carbon Potential Control
连续式热处理炉（氮气气氛保护）
配备有脱磷和碳势自动控制工艺



Grinding Machine
平面磨床

Tooling assemble Machine
模具装配设备

表面处理 Surface Coating



Plating Line with Hydrogen
De-embrittlement
Phosphating Line
电镀线, 配去氢脆线
磷化线

电镀层种类 Coating

电镀--Cr3+ 和/或Cr6+
Zinc--Cr3+ and/or Cr6+

黑锌
Black Zinc Plating

电镀加封闭
Zinc Plus Seal

镀锌
Zinc-Iron

镀锌
Zinc-Nickle

镀锌
Zinc-Cobalt

镀锡
Zinc-Tin

镀镍铬
Nickle-Chromium

Organic Surface Coatings

Magni
Dacromate
Geomet
Delta

Thread Patches

Nylon Thread lock patch
3M Scotch grip
Precote



办公室地址：浙江省嘉兴市南湖商会大厦B座708室

联系电话： +86 18868392286

电子邮箱： contact@tmfastener.com

